

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield DBD

Customer:	Varied
Product Designation (OPN):	DBD
Luminous Transmittance:	22%
Date of Revision:	12/08/10
Edited by:	David W. Bothner


Graphs represent nominal filter characteristics

L-Rating

190-315 D LB7 + IR LB3
 >315-532 D LB5 + IRM LB7
 760- <770 + >1075-1085 DIR LB5
 800-820 + >960-1064 D LB6 + IRM LB7
 770- <800 + >820-960 + >1064-1075 DIRM LB6

Optical Density

190-534nm 7+
 790-850nm 7+
 >960-1070nm 7+
 760-1090nm 5+
 >850-960nm 6+

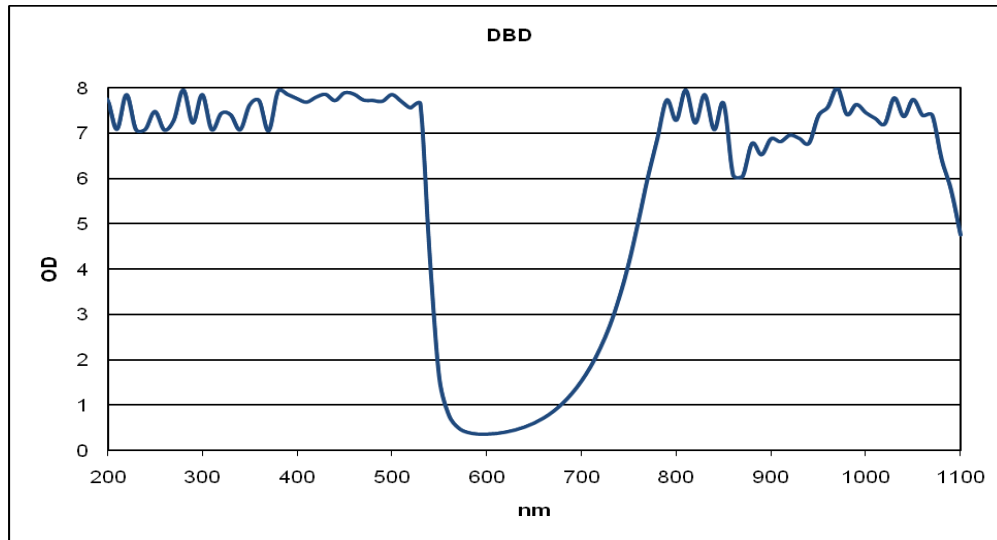


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

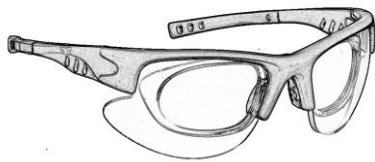

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.