

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com


Product Specification LaserShield DI2

Customer:	Varied
Product Designation (OPN):	DI2
Luminous Transmittance:	61%
Date of Revision:	2/27/08
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

L-Rating
 180-315 D L6 + R L4
 >315-390 D L4 + R L6
 785-830 D L4 + I L5
 800-818 D L5 + I L6

Optical Density
 180-390nm 6+
 785-830nm 5+
 800-818nm 6+

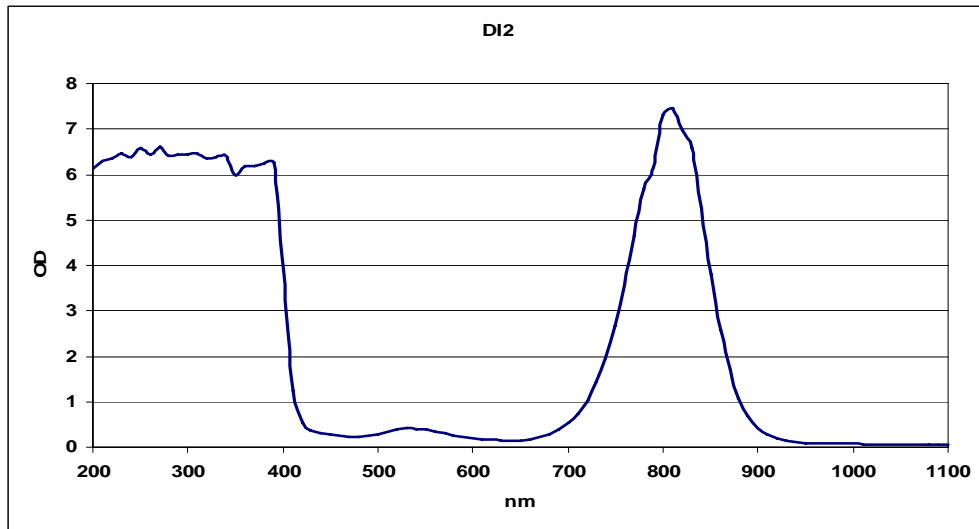

#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.