

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com


Product Specification LaserShield DI4

Customer:	Varied
Product Designation (OPN):	DI4
Luminous Transmittance:	12%
Date of Revision:	2/27/08
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

L-Rating
 180-315 D L7 + R L3
 >315-400 D L4 + R L6
 >830-850 DIR L3
 625-830 DR L4
 625-670 + >800-830 I L4
 >670-800 I L5

Optical Density
 190-400nm 5+
 625-850nm 4+
 662-835nm 5+
 633nm 5+

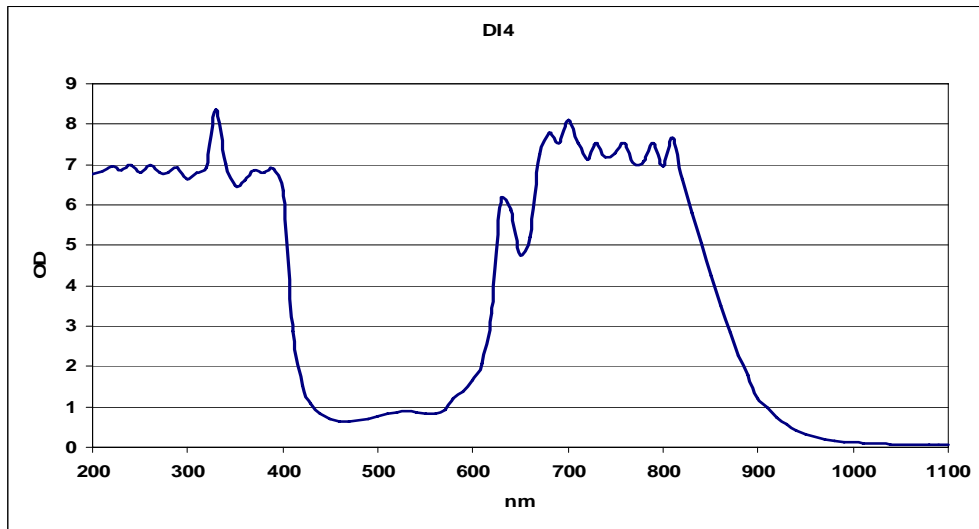


#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.