

# NoIR

P.O. Box 159 South Lyon Michigan 48178  
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708  
[www.noirlaser.com](http://www.noirlaser.com)


## Product Specification LaserShield DIA

Customer:	Varied
Product Designation (OPN):	DIA
Luminous Transmittance:	39%
Date of Revision:	7/12/07
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

**L-Rating**  
 180-315 D L6  
 180-395 R L4  
 >315-395 D L4  
 .01W 2\*10<sup>-6</sup>J 605-675 R1  
 .1W 2\*10<sup>-5</sup>J >675-695 R2

**Optical Density**  
 190-380nm 5+  
 630-700nm 1.5+

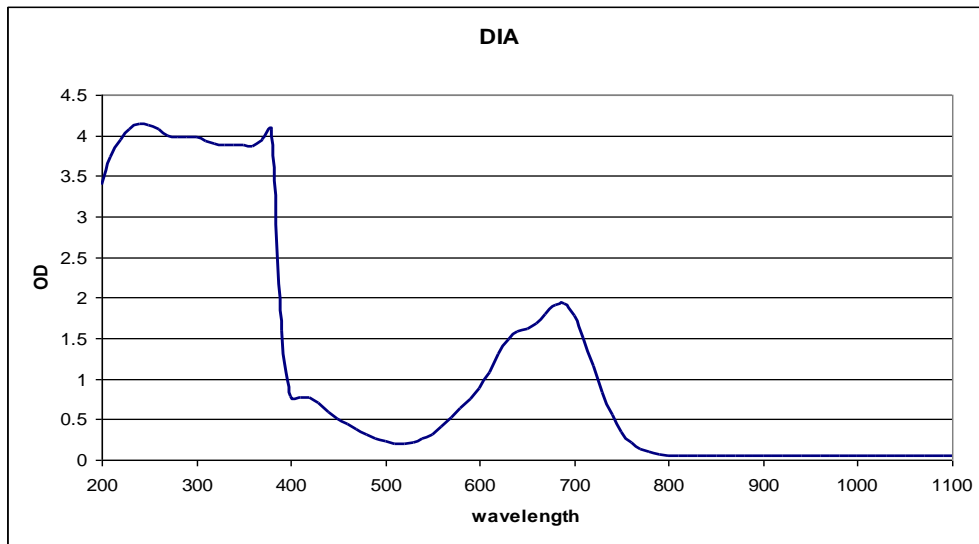


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

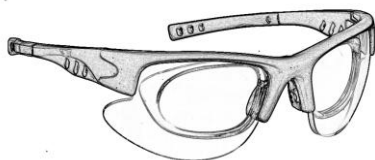

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at [www.lasereyeprotection.com](http://www.lasereyeprotection.com).  
 All LaserShield frames carry a lifetime warranty.