

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com


Product Specification LaserShield DIA

Customer:	Varied
Product Designation (OPN):	DIA
Luminous Transmittance:	39%
Date of Revision:	5/12/11
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

L-Rating
 180-315 D LB6 + R LB4
 >315-395 DR LB4
 .01W 2*10E-6J 605-675 RB1
 .1W 2*10E-5J >675-695 RB2

Optical Density
 190-380nm 5+
 630-700nm 1.5+

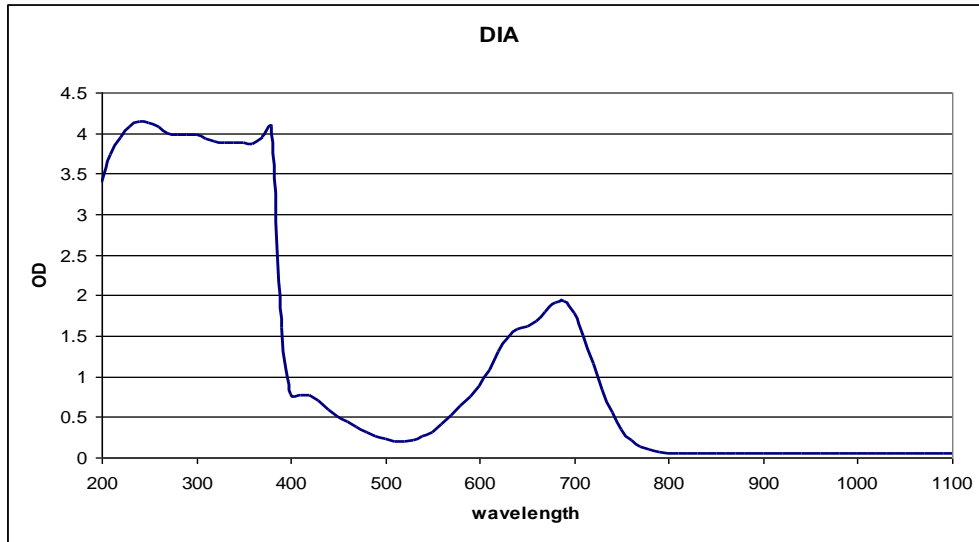


#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.

All LaserShield frames carry a lifetime warranty.