

NoIR

P.O. Box 159 South Lyon Michigan 48178
Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield IRD

Customer:	Varied
Product Designation (OPN):	IRD
Luminous Transmittance:	19%
Date of Revision:	2/27/08
Edited by:	David W. Bothner


Graphs represent nominal filter characteristics

L-Rating

180-315 D L6 + R L4 316-400 DR L4 770-820 + 1401-1840 DIR L2
866-1145 DIR L4 940-1064 IR L5 1065-1145 IR L4
821-865 + 1146-1400 DIR L3

Optical Density

190-450 nm 5+
820-1720 nm 3+

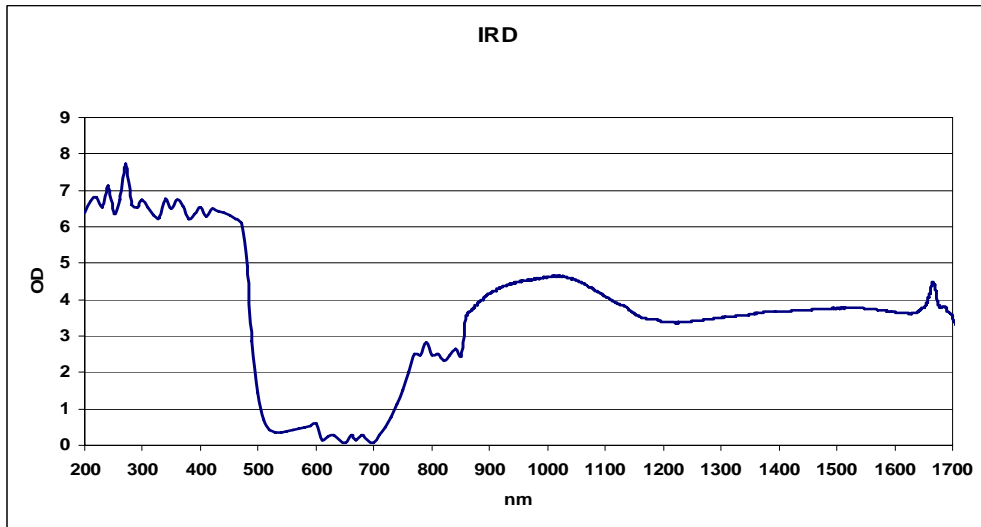



#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable

Other frame styles available at www.lasereyeprotection.com.

All LaserShield frames carry a lifetime warranty.