

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com


Product Specification LaserShield LIA

Customer:	Varied
Product Designation (OPN):	LIA
Luminous Transmittance:	51%
Date of Revision:	5/12/11
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

L-Rating
190-315 D LB8 + IR LB4
>315-390 D LB4 + IR LB6
730-760 DIR LB5
745-760 R LB5
750-760 I LB7

Optical Density
180-400 nm 5+
730-760 nm 5+
750-760 nm 7+

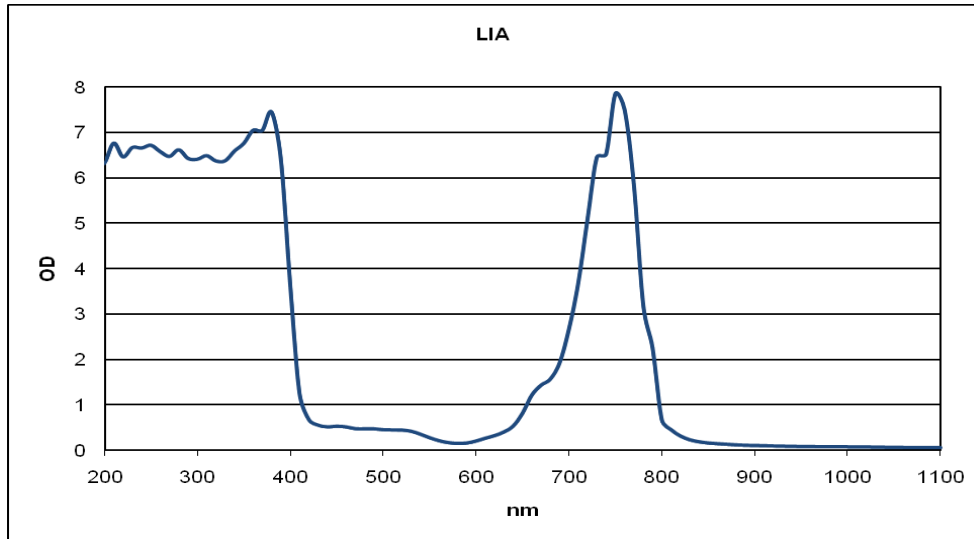


#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.