

NoIR


P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield MLA

Customer:	Varied
Product Designation (OPN):	MLA
Luminous Transmittance:	26%
Date of Revision:	11/08/07
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

<u>L-Rating</u>	<u>Optical Density</u>
190-315 D L7 + IR L4	190-400 nm 5+
>315-400 DIRM L5	532nm 1.5+
.01W 2*10 ⁻⁶ J 532 + 630-<636 R1	633-640nm 1.4+
.1W 2*10 ⁻⁵ J 636-640 R2	

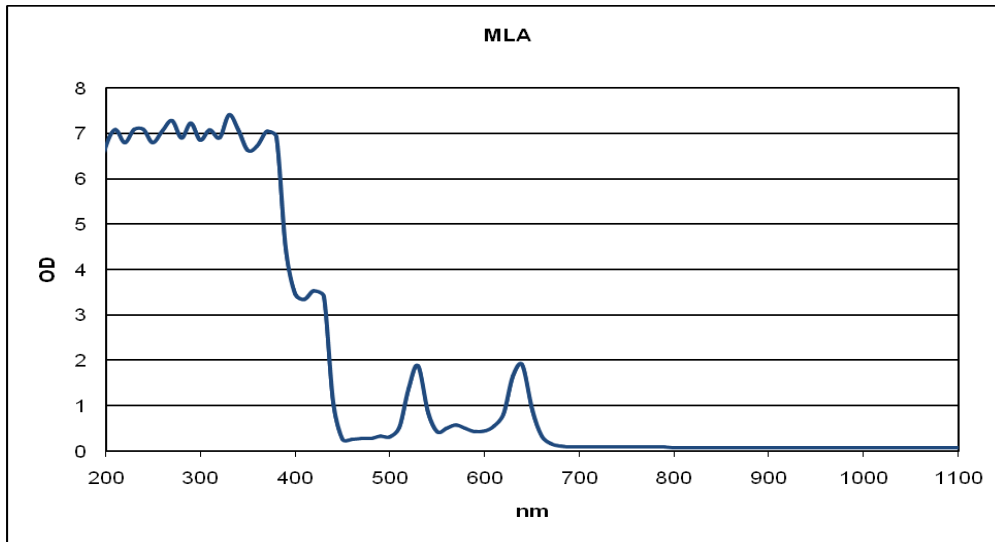


#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.

All LaserShield frames carry a lifetime warranty.