

NoIR

P.O. Box 159 South Lyon Michigan 48178
Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield RB3

Customer:	Varied
Product Designation (OPN):	RB3
Luminous Transmittance:	56%
Date of Revision:	2/12/07
Edited by:	David W. Bothner


Graphs represent nominal filter characteristics

L-Rating

180-315 D L5 + R L4
>315-400 D L4
625-665 DIR L1
>665-<694 DIR L2
694-700 D L4 + I L7 + R L6
>700-710 D L4 + IR L6

Optical Density

190-400 nm 5+
630-665 nm 1.5+
680-710 nm 5+
685-705 nm 6+

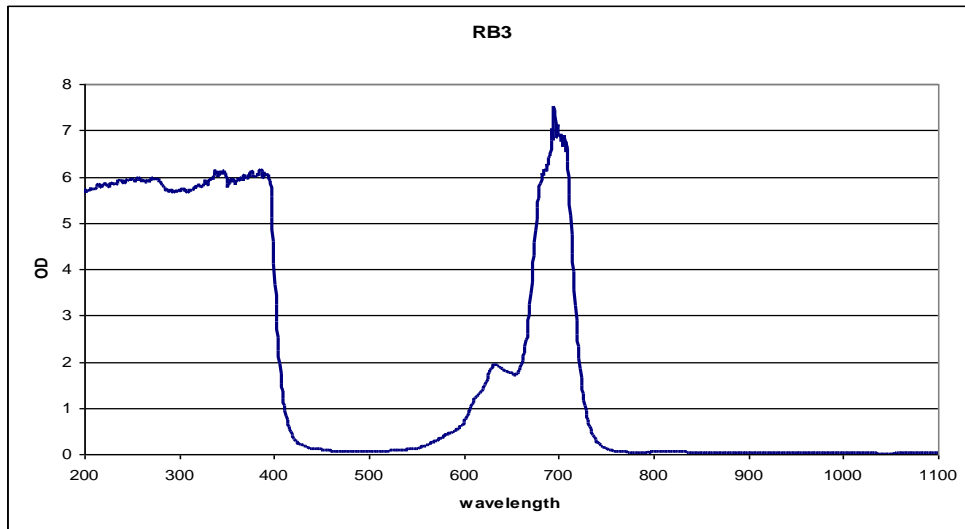


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

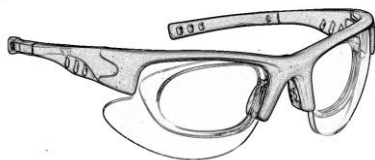

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.

All LaserShield frames carry a lifetime warranty.