

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com


Product Specification LaserShield YG3

Customer:	Varied
Product Designation (OPN):	YG3
Luminous Transmittance:	59%
Date of Revision:	6/1/09
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

L-Rating
808-840 DIR L4
840-950 + >1070-1090 DIR L5
840-1090 M L5
>950-1070 D L5 + IR L7

Optical Density
190-400 nm 5+
808-840 nm 4+
>840-950 nm 5+
950-1070 nm 7+
1064 nm 7+

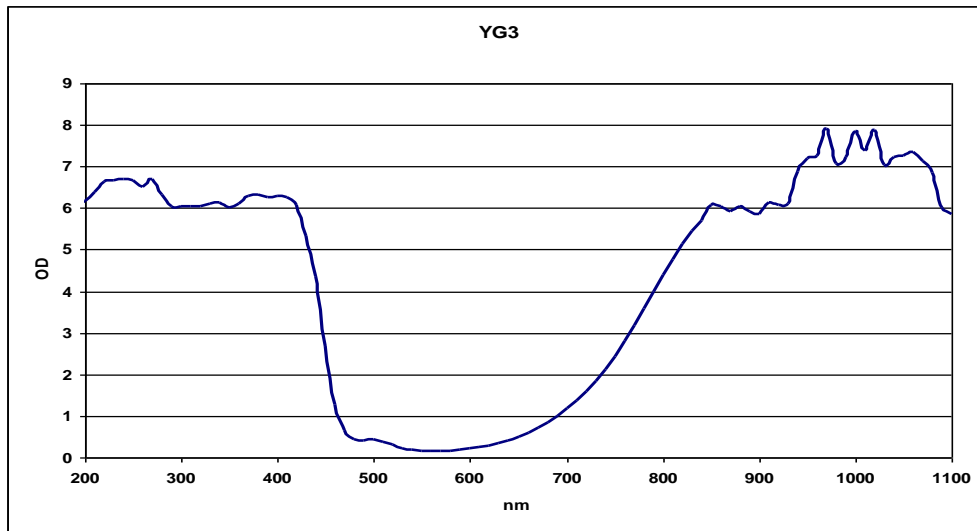


#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.