

NoIR

P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com


Product Specification LaserShield YG3

Customer:	Varied
Product Designation (OPN):	YG3
Luminous Transmittance:	59%
Date of Revision:	10/1/10
Edited by:	David W. Bothner

Graphs represent nominal filter characteristics

L-Rating
 808-840 DIRM LB4
 >840-950 + >1070-1090 DIRM LB5
 >950-1070 D L6 + IRM LB7

Optical Density
 190-400nm + >840-950nm + >1070-1090nm 5+
 808-840nm 4+
 >950-1070nm 7+

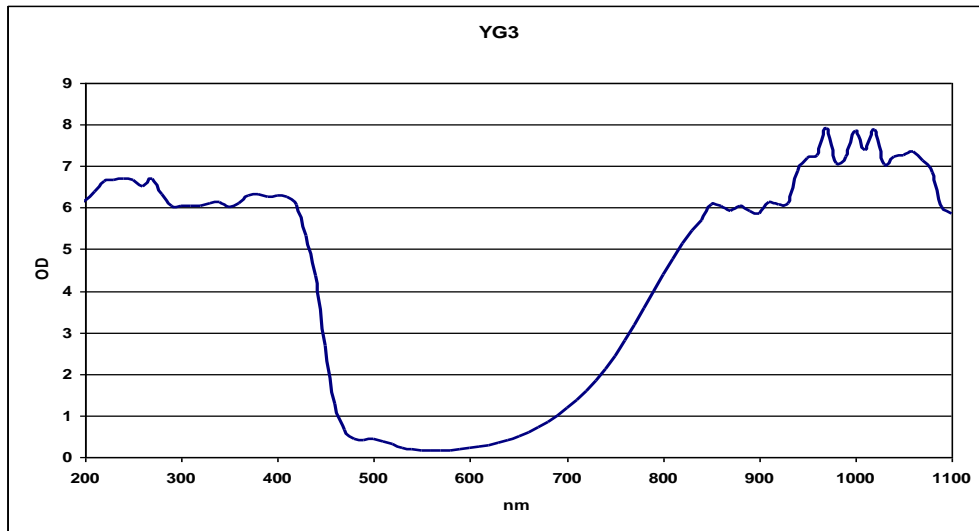


#35 Wrap-Around




#39 Large Fitover or #31 Small Fitover



#33 Universal



#34 Wrap with Rx Insert

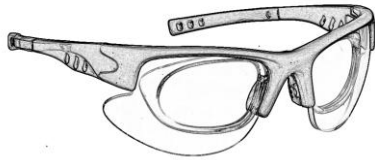

#38 Large Adjustable



#36 Universal Adjustable



Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.