

NoIR


P.O. Box 159 South Lyon Michigan 48178
 Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708
www.noirlaser.com

Product Specification LaserShield RB3

| | |
|----------------------------|------------------|
| Customer: | Varied |
| Product Designation (OPN): | RB3 |
| Luminous Transmittance: | 56% |
| Date of Revision: | 5/12/11 |
| Edited by: | David W. Bothner |

Graphs represent nominal filter characteristics

| <u>L-Rating</u> | <u>Optical Density</u> |
|-------------------------------|------------------------|
| 180-315 D LB5 + R LB4 | 190-400 nm 5+ |
| >315-400 D LB4 | 630-665 nm 1.5+ |
| 625-665 DIR LB1 | 680-710 nm 5+ |
| >665-<694 DIR LB2 | 685-705 nm 6+ |
| 694-700 D LB4 + I LB7 + R LB6 | |
| >700-710 D LB4 + IR LB6 | |
| >710-720 DIR LB2 | |

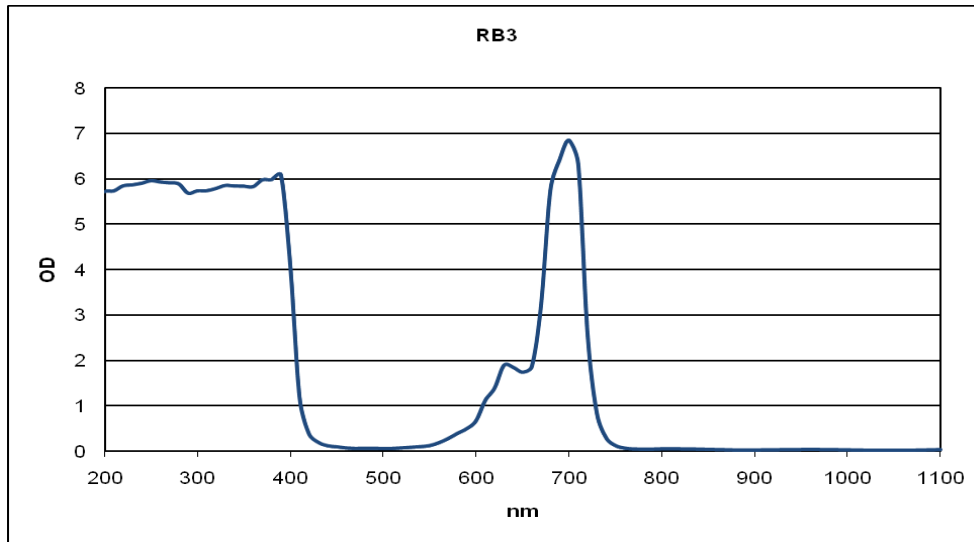



#35 Wrap-Around



#39 Large Fitover or #31 Small Fitover



#33 Universal

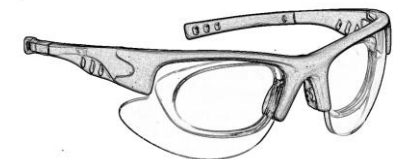

#34 Wrap with Rx Insert



#38 Large Adjustable



#36 Universal Adjustable

Other frame styles available at www.lasereyeprotection.com.
 All LaserShield frames carry a lifetime warranty.

NoIR

P.O. Box 159 South Lyon Michigan 48178

Phone: 1.800.521.9746 734.769.5565 Fax:734.769.1708

www.noirlaser.com